

# A Comparative Study of Addition of Admixtures in Concrete Mix Design



Deepshikha Jain<sup>1\*</sup> and Jay Shah<sup>2</sup>

<sup>1</sup>Department of Civil Engineering, Samrat Ashoka Technological Institute, India

<sup>2</sup>Center for Environmental Planning and Technology University

Submission: July 01, 2019; Published: July 12, 2019

\*Corresponding author: Deepshikha Jain, Department of Civil Engineering, Samrat Ashoka Technological Institute, India

## Abstract

Cement possesses novel position among the cutting edge development materials, Concrete is a material utilized in structure development, comprising of a hard, artificially inactive particulate substance, known as a total (typically made of various sorts of sand and rock), that is fortified by bond and water. A blend plan method for elite cement blends has been displayed in this paper. Since rheological parameters and compressive quality are major properties of cement in two distinct phases of generation, the connection between rheological parameters and compressive quality has been utilized as opposed to utilizing water-bond proportion versus compressive quality relationship. Water-bond proportion and total volume to glue volume proportion has likewise been resolved from rheological conduct and utilized in the blend structure. In the proposed technique, the architect can evaluate parameters like compressive quality and efficient costing at the structure organize for a given target quality, notwithstanding elements of cement [1].

**Keywords:** Concrete mix design; Chemical admixtures; Water cement ratio; Portland cement

## Introduction

Chemical admixtures are the ingredients in concrete aside from Portland cement, water, and mixture that are added to the combo forthwith before or throughout mix. Producers use admixtures primarily to scale back the price of concrete construction; to change the properties of hardened concrete; to make sure the standard of concrete throughout mix, transporting, placing, and curing; and to beat sure emergencies throughout concrete operations [2].

Successful use of admixtures depends on the utilization of applicable strategies of batching and concreting. Most admixtures square measure equipped in ready-to-use liquid type and square measure value-added to the concrete at the plant or at the jobsite. sure admixtures, like pigments, expansive agents, and pumping aids square measure used solely in very little amounts and square measure typically batched by hand from premeasured containers.

The effectiveness of AN admixture depends on many factors including: sort and quantity of cement, water content, mix time, slump, and temperatures of the concrete and air. Sometimes, effects almost like those achieved through the addition of admixtures may be achieved by fixing the concrete mixture-reducing the water-cement magnitude relation, adding

extra cement, employing a totally different style of cement, or dynamical and aggregate gradation [3].

Admixtures are classed according to function. There are five distinct classes of chemical admixtures: air-entraining, water-reducing, retarding, accelerating, and plasticizers (superplasticizers). All other varieties of admixtures fall into the specialty category whose functions include corrosion inhibition, shrinkage reduction, alkali-silica reactivity reduction, workability enhancement, bonding, damp proofing, and colouring. Air-entraining admixtures, which are used to purposely place microscopic air bubbles into the concrete [4].

## Steel Fiber

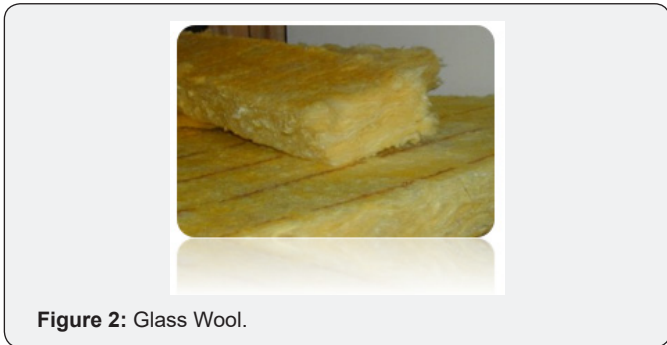


Figure 1: Steel Fiber.

Steel fibre is a metal reinforcement. Steel fibre for reinforcing concrete is defined as short, discrete lengths of steel fibres with an aspect ratio (ratio of length to diameter) from about 20 to 100, with different cross-sections, and that are sufficiently small to be randomly dispersed in an unhardened concrete mixture using the usual mixing procedures Figure 1.

**Glass Wool**

Glass-fibre reinforced concrete (GRC) is a material made of a cementitious matrix composed of cement, sand, water and admixtures, in which short length glass fibres are dispersed. It has been widely used in the construction industry for non-structural elements, like façade panels, piping and channels Figure 2.




**SRB Latex**

SBR LATEX is a carboxylate styrene butadiene copolymer latex admixture that is designed as an integral adhesive for cement bond coats, mortars and concrete to improve bond strength and chemical resistance Figure 3.




**Rice Straw and Cement Bags Pieces**

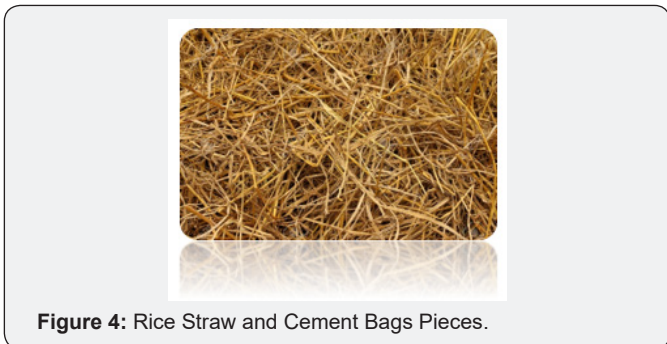

Rice straw was picked up from fields in jute bags. Rice straw was cut into small pieces with the help of chaff cutter, and then burned in the muffle furnace at controlled temperature. A total of 5% of cement was replaced with rice straw ash Figure 4.

**Results and Discussions**

Figure 5 and Table 1

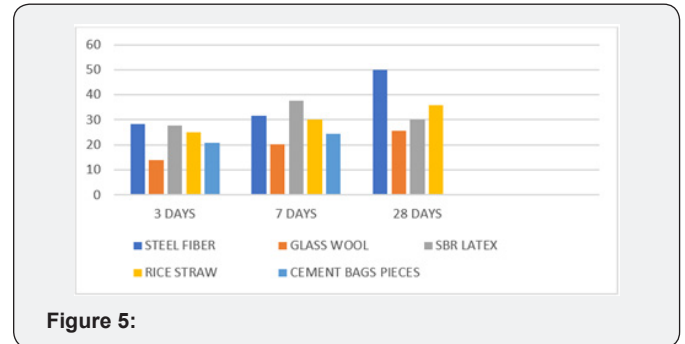

**Table 1:** Mechanisms of transformation of several types of indirect sources of sand and dust.

Type of indirect source	Mechanisms of transformation	Cases	Remarks
Fluvial sediments	- Drying up and cracking.	Ritqa -Abdaly	Observed after the floods of Dec. 2010 and November 2013
	- Mechanical breaking and disruption (off road vehicles and trampling).		
	- Sand blasts & deflation process		
Bare Sabkha	- Drop of shallow groundwater table.	Wafra - Al Zour sector	remarkable emission of dust, (June 2016)
	- Dryness and cracking of the topsoil (few centimeters)		
	- Sand blasts & deflation process.		
Concealed fine textured soil	Removal /disruption of armor layer (protective desert pavement)	Abraq-Salmi	
Vegetated sand sheets	Loss of vegetation cover	Umm Nega -Sabiyah sector	observed 2009 & 2017

**Conclusion**

As per the results steel fiber give more strength on the concrete but its cost is higher, so instead of steel fiber we can use the rice straw and pieces of cement bags and get enough strength. Here we are getting more strength than the require strength in M25 grade so we can reduce the grade like M15 and get the target strength.

**References**

1. Is 456 (2000) Plain and Reinforced Concrete-Code of Practice.

2. Study of mix design of self-compacting concrete on m30 grade, Raghuvver, griet.
3. Comparative study of concrete mix design by adding various types of admixtures, jay shah April 2014.
4. <https://www.cement.org/cement-concrete-applications/concrete-materials/chemical-admixtures>



This work is licensed under Creative Commons Attribution 4.0 License  
DOI: [10.19080/CERJ.2019.08.555747](https://doi.org/10.19080/CERJ.2019.08.555747)

**Your next submission with Juniper Publishers  
will reach you the below assets**

- Quality Editorial service
- Swift Peer Review
- Reprints availability
- E-prints Service
- Manuscript Podcast for convenient understanding
- Global attainment for your research
- Manuscript accessibility in different formats  
**( Pdf, E-pub, Full Text, Audio)**
- Unceasing customer service

**Track the below URL for one-step submission**

<https://juniperpublishers.com/online-submission.php>