



Short Communication

Volume 8 Issue 4 - November 2018
DOI: 10.19080/BBOAJ.2018.08.555744

Biostat Biometrics Open Acc J
Copyright © All rights are by Tung-Lung Wu

Exact Degree Distributions of a Simple Preferential Attachment Model



Tung-Lung Wu*

Department of Mathematics and Statistics, Mississippi State University, USA

Submission: June 07, 2018; Published: November 16, 2018

*Corresponding author: Tung-Lung Wu, Department of Mathematics and Statistics, Mississippi State University, USA

Abstract

We study the exact degree distribution for a simple preferential attachment model. Suppose that there is only one initial node and each new node is allowed to connect to one existing node, the exact degree distributions are obtained using the finite Markov chain imbedding technique. Numerical results are given to demonstrate our result.

Keywords: Preferential attachment models; Degree distributions; Finite Markov chain imbedding

Introduction

Preferential attachment models have been successfully used to model human networks. Examples of this line of research include some empirical studies such as biological network and human behavior network. Many graph models including preferential attachment models are shown to have power laws. Approximations and bounds have also been developed for degree distributions [1-5]. In this paper, we will show how to compute the exact degree distribution for a simple preferential attachment model based on the finite Markov chain imbedding (FMCI) technique [3].

We consider the simple model where there is only $t=1$ initial node (label 0) and each new node (child) is only allowed to connect to $m=1$ existing node (parent) in the network. The k -th node joining the network is given a label k . For each node, the in-degree is the number of children and the outdegree is always 1 for new coming node. The only exception is the initial node whose out-degree is 0. The degree of a node is defined to be the sum of indegree and out-degree. The probability of a new node connecting to any node is proportional to its degree.

Let $D_k(n)$ be the degree of label k at time n . It is not difficult to see that $D_k(n)$ forms a discrete Markov chain. We can define a Markov chain $\{Y_t\}_{t=0}^n$ on state space $\Omega_t = \{0, 1, 2, \dots, t-k+1\}$ with initial probability $P(Y_0=0)=1$. As the model grows over time with new nodes, the probability of a new node connecting to label i is also changing over time. Thus, $\{Y_t\}_{t=0}^n$ is a non-homogeneous Markov chain. For a node labeled $k \geq 1$, the maximal degree at time t is $t-k+1$. At time $t=1$,

$$P(Y_t = v | Y_0 = 0) = \begin{cases} 1 & \text{if } v=1, k=0,1, \\ 1 & \text{if } v=0, k \geq 2, \\ 0 & \text{otherwise.} \end{cases} \quad (1)$$

Also, $P(Y_t=0 | Y_{t-1}=0)=1$ for $2 \leq t \leq k-1$. The transition probabilities of the imbedded Markov chain $\{Y_t\}$ are given as follows: at time $t \geq k$,

$$P(D_k(t) = i | D_k(t-1) = i) = \frac{i}{2(t-1)}$$

$$P(D_k(t) = i+1 | D_k(t-1) = i) = 1 - \frac{i}{2(t-1)}$$

The transition matrices of $\{Y_t\}_{t=0}^n$ are of the following form for $t \geq k$,

$$M_t = \begin{matrix} & \begin{matrix} 0 & 1 & \dots & i & \dots & t-k & t-k+1 \end{matrix} \\ \begin{matrix} 0 \\ 1 \\ \vdots \\ i \\ \vdots \\ t-k \end{matrix} & \begin{pmatrix} 0 & 1 & \dots & i & \dots & t-k & t-k+1 \\ 1 - \frac{1}{2(t-1)} & \frac{1}{2(t-1)} & & & & & 0 \\ & \ddots & & & & & \\ & & 1 - \frac{i}{2(t-1)} & \frac{i}{2(t-1)} & & & \\ & & & \ddots & & & \\ & 0 & & & 1 - \frac{t-k}{2(t-1)} & \frac{t-k}{2(t-1)} \end{pmatrix} \end{matrix}$$

Hence, the degree distribution of label k is given by

$$P(D_k(n) = i) = \xi_0 \prod_{t=k}^n M_t e_i \quad (2)$$

Where $\xi_0 = 1$ and $e_i' = (0, \dots, 0, 1, 0, \dots, 0)$ with one corresponding to state i . The exact degree distributions of labels $k=1, 10, 50, 100$ for $n=200, 500, 1000, 2000$ are given in Figure 1.

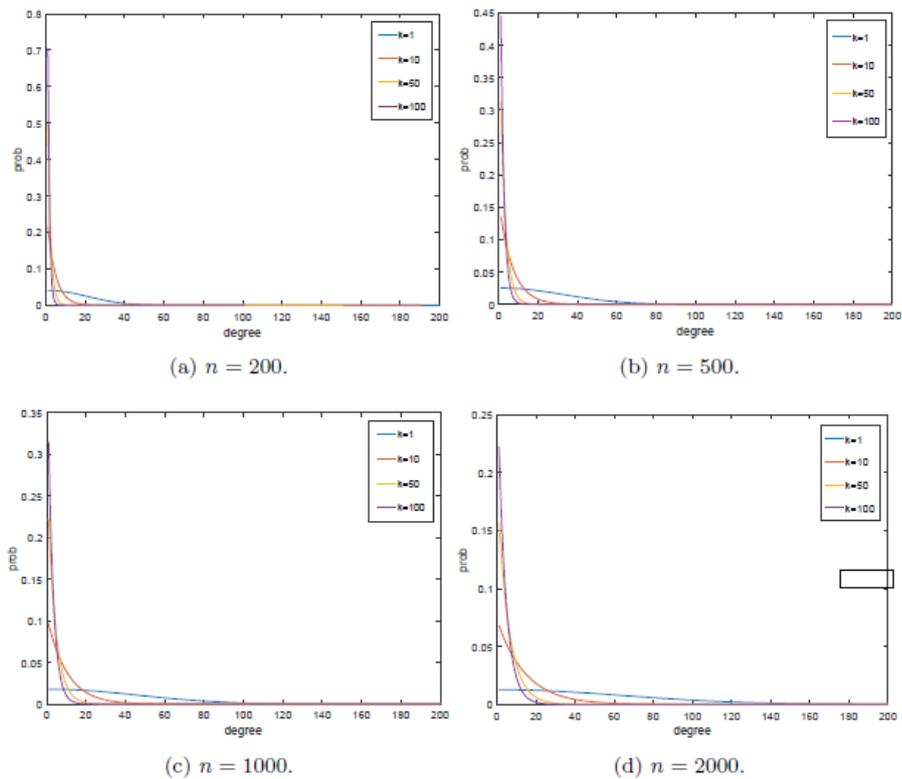


Figure 1: The exact degree distributions with different n .

Conclusion

Preferential attachment models have recently gained popularity in modeling human networks. In this short paper, we illustrate how to obtain the exact degree distributions based on the FMCI technique for a simple model and hope that this will attract more interest in this line of work.

References

1. Chung F, Lu L (2006) Complex graphs and networks. CBMS Regional Conference Series in Mathematics, Published for the Conference Board of the Mathematical Sciences, Washington. American Mathematical Society, Volume 107.

2. Eisenberg E, Levanon EY (2003) Preferential attachment in the protein network evolution. Phys Rev Lett 91: 138.
 3. Fu JC, Lou WY (2003) Distribution theory of runs and patterns and its applications. World Scientific Publishing Co., Inc., River Edge, UK.
 4. Jones JH, Handcock MS (2003) An assessment of preferential attachment as a mechanism for human sexual network formation. Proceedings of the Royal Society of London B: Biological Sciences 270(1520): 1123-1128.
 5. Pekoz EA, Rollin A, Ross N (2013) Degree asymptotics with rates for preferential attachment random graphs. Ann Appl Probab 23(3): 1188-1218.



This work is licensed under Creative Commons Attribution 4.0 License
 DOI: 10.19080/BBOAJ.2018.08.555744

Your next submission with Juniper Publishers will reach you the below assets

- Quality Editorial service
- Swift Peer Review
- Reprints availability
- E-prints Service
- Manuscript Podcast for convenient understanding
- Global attainment for your research
- Manuscript accessibility in different formats
(Pdf, E-pub, Full Text, Audio)
- Unceasing customer service

Track the below URL for one-step submission
<https://juniperpublishers.com/online-submission.php>